INTRODUCTION

Signal Input Channel CH1-CH6:
Used to connect with the probe.

Probe compensation output and ground; Used to calibrate probe

USB port: Used to connect the scope with PC.

Digital output Channel: Used to output digital signal

Signal Input Channel CH7-CH8: Used to connect with the probe.
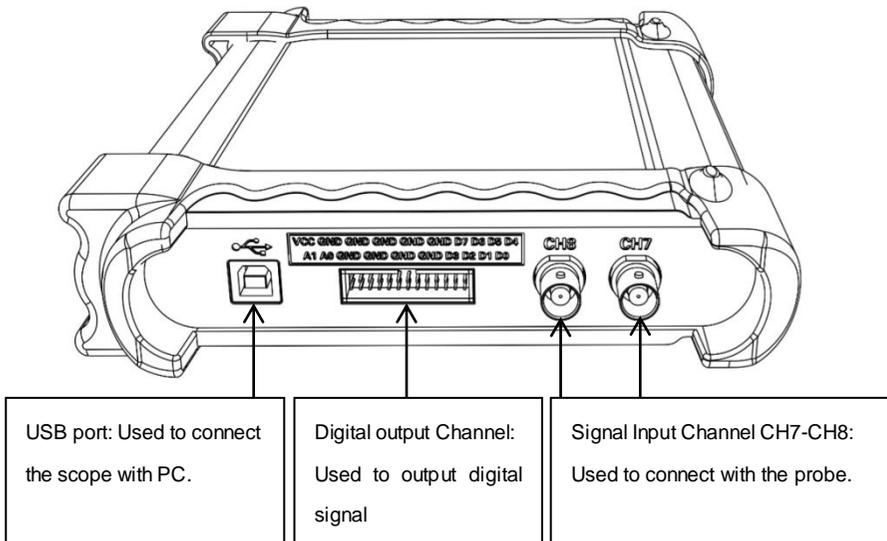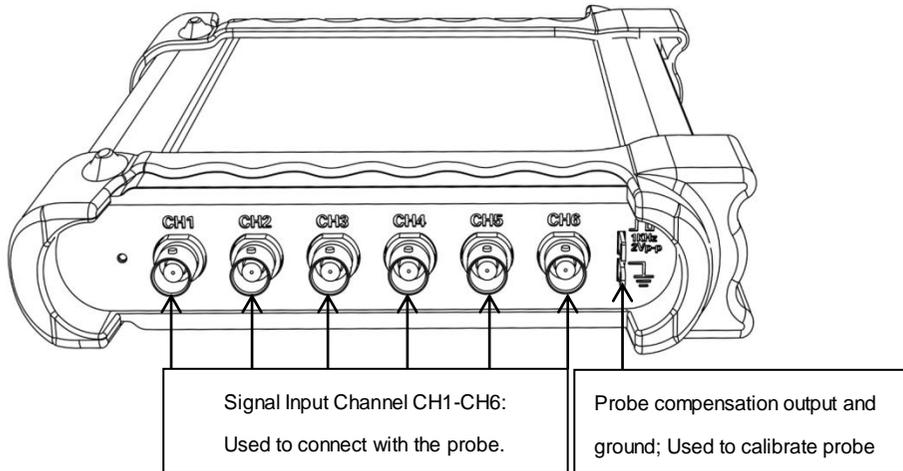
STEP

Download

Firstly, please scan the two-dimension code on scope or click the following link to download the software and user guide.
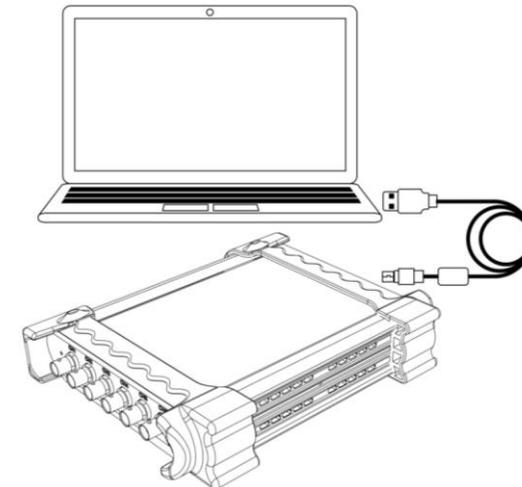

https://e.hantek.com/Products/hantek1008c

Install Software

Double click *Setup.exe*. According to the information, install the software step by step.

There will be "Hantek1008" icon on desktop.

Connect the device with PC

Run the software

Double click icon on desktop to run the software.